

552, 560

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/095278 A1

(51) International Patent Classification⁷: **G06F 11/00**,
G08C 15/00, H04J 3/14, 3/16, H04L 1/00, 12/26, 12/28,
12/56

Mark, Ryan [US/US]; 1140 Portland Place, Suite #306,
Boulder, CO 80304 (US).

(21) International Application Number:
PCT/US2004/005684

(74) Agents: **TRIPOLI, Joseph, S. et al.**; Two Independence
Way, Suite #200, Princeton, NJ 08540 (US).

(22) International Filing Date: 26 February 2004 (26.02.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/462,998 15 April 2003 (15.04.2003) US

(71) Applicant (for all designated States except US): **THOM-
SON LICENSING S.A.** [FR/FR]; 46, Quai A. Le Gallo,
F-92648 Boulogne (FR).


(72) Inventor; and

(75) Inventor/Applicant (for US only): **MAYERNICK,**

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR ROUTER PORT CONFIGURATION

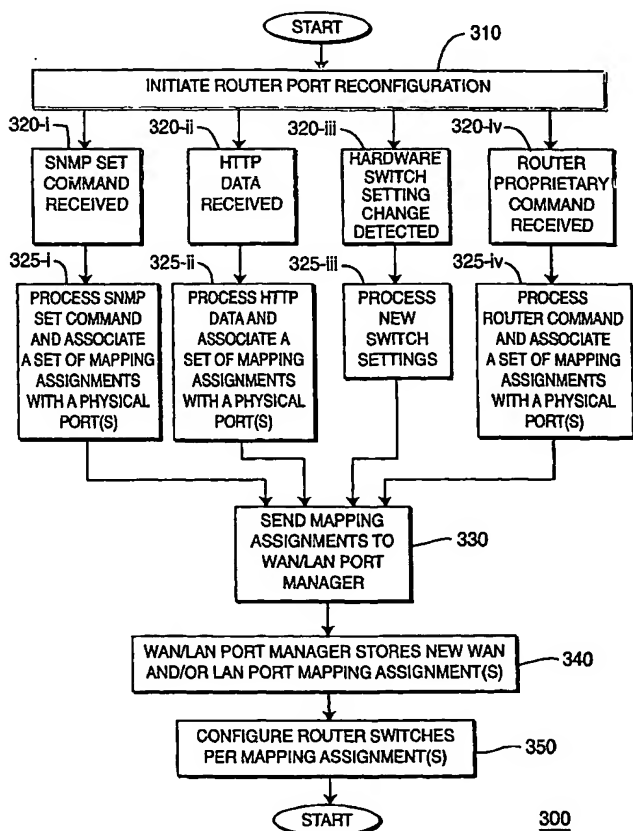

(57) Abstract: A method (300) and apparatus (200) for selectively configuring, in a router, physical ports to either a Wide Area Network (WAN) or a Local Area Network (LAN). Method steps include receiving (320) a message to configure a physical port for use with either the LAN or WAN; associating (325), in response to receiving the message, a set of mapping assignments for using the physical port to access the network; and implementing (330) the mapping assignments, in response to associating the mapping assignments, to configure the physical port for coupling to the network.

WO 2004/095278 A1



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*